



- BATTERY:** Flooded/wet lead-acid battery
DIMENSIONS: inches (mm)
COLOR: Maroon (case/cover)
MATERIAL: Polypropylene (internal cell) • Polyethylene (outer container)

Trojan's Industrial Line of deep-cycle batteries is the newest addition to Trojan's lineage of high-quality flooded batteries. The Industrial Line is engineered specifically to support renewable energy systems with large daily loads where the batteries are cycled regularly. These high amp-hour capacity batteries are ideal for use in large off-grid photovoltaic (PV) systems, off-grid hybrid PV systems, grid-tied PV systems with battery backup, smart grid peak shifting systems and a variety of other applications. Tested to meet industry standards, the Industrial Line features advanced battery technologies that deliver reliable power and is housed in a dual container construction for enhanced battery protection. Trojan's Industrial line is the perfect combination of performance and function.

PRODUCT SPECIFICATION

BCI GROUP SIZE	TYPE	CAPACITY ^A Amp-Hours (AH)								ENERGY (kWh)	VOLTAGE	TERMINAL Type	DIMENSIONS ^B Inches (mm)			WEIGHT lbs. (kg)
		5-Hr Rate	10-Hr Rate	20-Hr Rate	48-Hr Rate	72-Hr Rate	100-Hr Rate	240-Hr Rate	100-Hr Rate				Length	Width	Height ^C	
INDUSTRIAL LINE - DEEP-CYCLE FLOODED BATTERIES																
N/A	IND9-6V	355	402	445	505	530	545	550	3.27	6 VOLT	14	15-3/8 (390)	10-1/4 (260)	24 (610)	220 (100)	
N/A	IND13-6V	533	604	673	759	796	820	826	4.92	6 VOLT	14	22-3/8 (568)	10-1/4 (260)	24 (610)	315 (143)	
N/A	IND17-6V	711	805	897	1011	1061	1090	1101	6.54	6 VOLT	14	26-11/16 (678)	10-1/4 (260)	24 (610)	415 (188)	
N/A	IND23-4V	977	1106	1233	1390	1459	1500	1514	6.00	4 VOLT	14	22-3/8 (568)	10-1/4 (260)	24 (610)	370 (168)	
N/A	IND27-2V	1183	1337	1457	1642	1722	1780	1795	3.56	2 VOLT	14	15-3/8 (390)	10-1/4 (260)	24 (610)	228 (104)	
N/A	IND29-4V	1245	1409	1570	1770	1857	1910	1927	7.64	4 VOLT	14	26-11/16 (678)	10-1/4 (260)	24 (610)	465 (211)	
N/A	IND33-2V	1456	1646	1794	2072	2173	2187	2206	4.37	2 VOLT	14	17-1/3 (440)	10-1/4 (260)	24 (610)	278 (125)	

A. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

B. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal.

C. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

Trojan's battery testing procedures adhere to both BCI and IEC test standards.

CHARGING INSTRUCTIONS

CHARGER VOLTAGE SETTINGS (AT 77°F/25°C)	
	Voltage per cell
Absorption charge	2.35-2.45
Float charge	2.20
Equalize charge	2.58

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

OPERATIONAL DATA

OPERATING TEMPERATURE	SELF DISCHARGE	SPECIFIC GRAVITY
-4°F to 113°F (-20°C to +45°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Up to 4% per week	The specific gravity at 100% state-of-charge is 1.260


CHARGING TEMPERATURE COMPENSATION

To the Voltage Reading -- Subtract 0.005 volt per cell (VPC) for every 1°C above 25°C or add 0.005 volt per cell for every 1°C below 25°C.


EXPECTED LIFE VS. TEMPERATURE

Chemical reactions internal to the battery are driven by voltage and temperature. The higher the battery temperature, the faster chemical reactions will occur. While higher temperatures can provide improved discharge performance the increased rate of chemical reactions will result in a corresponding loss of battery life. As a rule of thumb, for every 10°C increase in temperature the reaction rate doubles. Thus, a month of operation at 35°C is equivalent in battery life to two months at 25°C. Heat is an enemy of all lead acid batteries, FLA, AGM and gel alike and even small increases in temperature will have a major influence on battery life.

TYPICAL CYCLE LIFE IN A STATIONARY APPLICATION

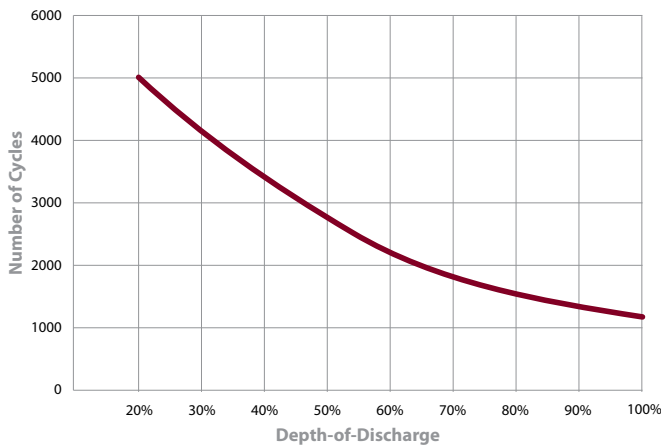

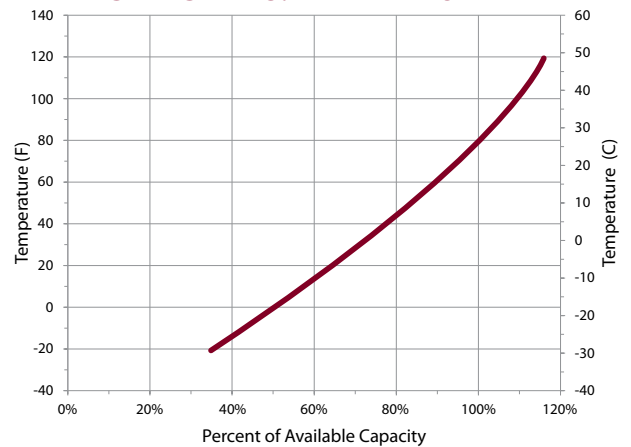

CAPACITY VS. TEMPERATURE



TERMINAL CONFIGURATIONS

14	IND	IND Terminal
		
<i>Terminal Height Inches (mm)</i> 1-3/4 (44)		
<i>Torque Values LB-IN (Nm)</i> 100 - 120 (11 - 14)		
<i>Through-hole Diameter Inches (mm)</i> 3/8 (10)		

VENT CAP OPTIONS

Bayonet	Flip Top
	



Trojan batteries are available worldwide.

We offer outstanding technical support, provided by full-time application engineers.

call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbatteryRE.com

12380 Clark Street, Santa Fe Springs, CA 90670 • USA or email re@trojanbattery.com