

# MARINE AND RV



 **Trojan**<sup>®</sup>  
BATTERY COMPANY  
*Clean energy for life™*




# THE LURE OF THE GREAT OUTDOORS...

TROLLING THE LAKE FOR THE PRIZE-WINNING BASS, DRIVING CROSS COUNTRY FOR THE ANNUAL RV RALLY, HAULING YOUR GEAR FOR A WEEKEND OF CAMPING OR SAILING THE OCEAN ON A BREEZY SUMMER'S DAY... WHATEVER YOUR PASSION NOTHING BRINGS YOU CLOSER TO THE GREAT OUTDOORS THAN ENJOYING IT FROM YOUR FAVORITE BOAT OR RV. TO ENSURE A DAY OF FUN IN THE SUN, RELIABLE BATTERIES ARE THE HEART TO POWERING YOUR BOATING AND RV ACTIVITIES.

SINCE 1925, TROJAN BATTERY HAS ENGINEERED THE WORLD'S MOST RELIABLE, LONG-LASTING, DEEP-CYCLE BATTERIES SPECIFICALLY DESIGNED TO MEET THE DEMANDS OF THE AVID RV'ER AND RECREATIONAL BOATER. TROJAN OFFERS THE BROADEST PORTFOLIO OF RECREATIONAL BATTERIES TO MEET YOUR SPECIFIC HOUSE POWER AND STARTING APPLICATIONS. RANGING FROM OUR DEEP-CYCLE FLOODED SERIES TO OUR MAINTENANCE-FREE AGM AND GEL BATTERIES THERE'S NO BETTER POWER SOLUTION THAN THE PROVEN TECHNOLOGY OF TROJAN. WHEREVER THE ROAD OR WATER MAY TAKE YOU, TROJAN BATTERIES WILL BE ALONG FOR THE RIDE TO POWER YOUR MARINE AND RV ADVENTURES.

# Deep-Cycle Flooded Batteries... Rugged Durability and Long Life

Trojan's deep-cycle flooded batteries are the flagship of Trojan's product portfolio. Engineered to provide rugged durability, outstanding performance and long life, Trojan's deep-cycle flooded batteries are perfectly suited for use in a variety of recreational applications. An all-around power house, the deep-cycle flooded batteries feature Trojan's historically-proven engineering with T2 Technology™, an advanced battery technology for maximum sustained performance, longer life and increased total energy.

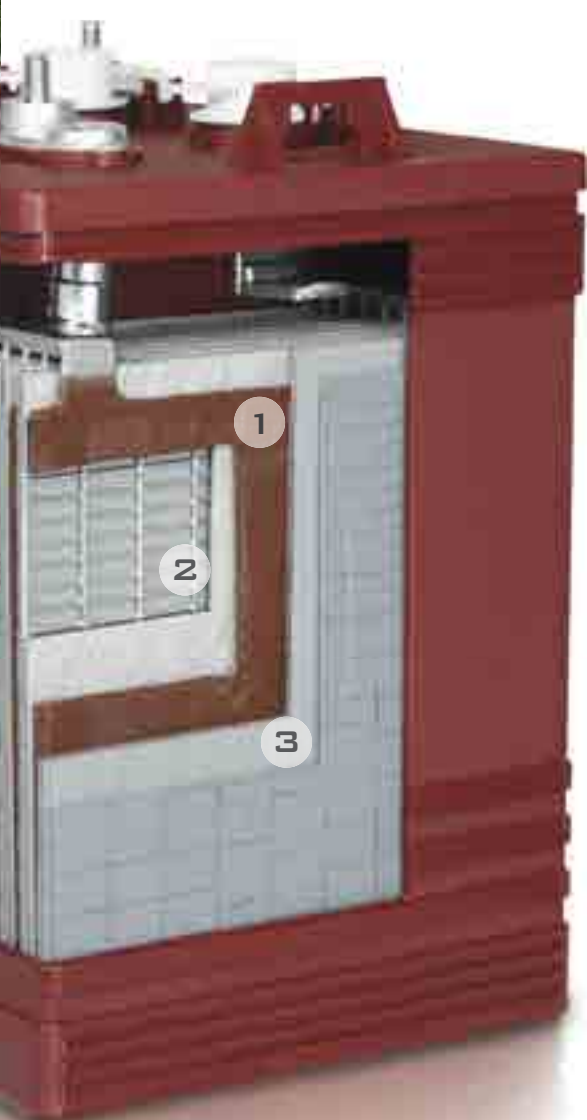

## 1 Alpha Plus® Paste with T2 Technology™ Maximum Operating Performance


Trojan's Alpha Plus Paste is a proprietary, high density paste formulation engineered to deliver outstanding battery performance. It optimizes porosity development in the active material utilizing the active material more effectively resulting in sustained battery performance over a longer period of time. Trojan's T2 Technology introduces a patent-pending T2 metal agent into Alpha Plus Paste strengthening its electrochemical processing capabilities. Alpha Plus Paste with T2 Technology increase both sustained capacity and total overall ampere-hours resulting in more operating power. It's a key reason why Trojan batteries consistently outperform the competition.

## 2 Trojan Grid Technology Reduced Downtime

Trojan's grid technology is a lead antimony alloy grid mixture formulated specifically for use with Trojan's Alpha Plus Paste with T2 Technology. The grid formulation provides exceptional structural adhesion between the Alpha Plus Paste and the grid frame. Thick grids reinforce the strength of the frame and reduce overall corrosion. The grid configuration is optimized to enhance current flow through the grid network providing exceptional battery performance, reducing downtime and lowering overall maintenance costs.

## 3 Maxguard® T2 Separator Longer Battery Life

Exclusively available in Trojan batteries is our Maxguard T2 advanced separator. Its multi-rib geometry design keeps acid channels open longer enhancing electrochemical processing while reducing the risk of stratification. Maxguard's proprietary rubber-based material formulation inhibits antimony transfer between the positive grids and negative plates; a protection not available in many other competitor batteries. A newly fortified, thick back web provides even greater separator strength resulting in a more robust battery with increased protection against failures caused by separator degradation. Trojan's Maxguard T2 advanced separator sustains performance, provides longer battery life and significantly lowers operating costs.

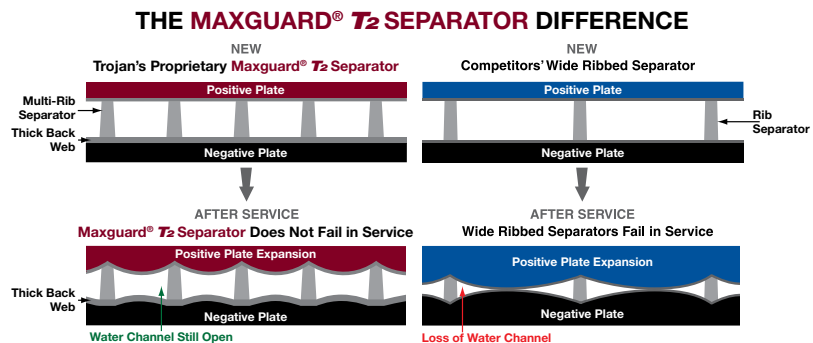





## ***Sealed Maintenance-Free Batteries...*** ***Outstanding Performance and Reliability***

For outdoor recreational vehicles and marine applications sealed, maintenance-free batteries offer a convenient power solution for RV and boating applications. Trojan offers a full line of sealed, maintenance-free, deep-cycle AGM and gel products engineered for optimum performance and longevity delivering more hours to explore the great outdoors.

### ***Deep-Cycle Gel Batteries***

Trojan deep-cycle gel batteries are sealed, maintenance-free batteries that deliver superior power in demanding RV and marine applications. Engineered for rugged durability, outstanding performance and long battery life, Trojan's deep-cycle gel batteries feature a number of important design characteristics that provide significant advantages over competing gel products. The gelled electrolyte is a proprietary formulation containing sulfuric acid, fumed silica, pure demineralized, deionized water and a phosphoric acid additive. This exclusive formulation produces a homogenous gel that delivers consistent performance and reliability. The heavy duty thick grids lock active material onto the grid network to efficiently deliver more concentrated energy to the terminals. Premium grade, double-insulated separators allow maximum charge flow between the plates for optimum performance. Because gel batteries can operate in a variety of extreme temperatures, they are ideal for use in a wide range of environments.



### ***Deep-Cycle AGM Batteries***

Trojan's deep-cycle absorbed glass mat (AGM) sealed, maintenance-free batteries feature a number of design elements to provide optimum performance. Robust plates extend the life cycle of Trojan's deep-cycle AGM batteries. A separator of glass fibers serves to isolate the positive and negative plates while acting as a blotter to absorb the electrolyte. The separator is maintained under compression between plates to assure contact with plate surfaces. A computer-generated grid design is optimized for high-power density. Low calcium grid alloy reduces gas emissions and a flame arresting, one-way pressure relief vent prevents buildup of excessive pressure. Trojan's deep-cycle AGM batteries are low-temperature tolerant, shock and vibration resistant and have a low internal resistance for higher discharge current and higher charging efficiency. Designed with advanced battery technology, Trojan AGM batteries deliver dependable power with long battery life.





Introducing  
**OverDrive AGM 31™**  
*Deep-Cycle Endurance*

The Trojan OverDrive AGM 31 battery is a true deep-cycle AGM battery. Engineered exclusively to withstand the rigors and abuse of deep discharge applications, the OverDrive incorporates a series of design features essential to deliver energy storage and duration required for when your boat or RV goes through long periods of time without power hook ups. Selecting the wrong type of battery will cause disappointing performance of boat and RV house power functions such as lighting, water pump, furnace and other appliances. The Trojan OverDrive AGM 31 delivers high power cycling for extended periods of time and is designed to work hard so you can play hard in the great outdoors.



Introducing  
**TransPower™ ST1000 AGM 31**  
*Starting Battery*

The TransPower ST1000 is built specifically for demanding starting applications and is designed with unique features that provide extended battery life when compared to conventional starting batteries. As a sealed, maintenance-free AGM 31 starting battery, the Trojan TransPower ST1000 is engineered for rugged durability, outstanding cranking power and provides nearly double the battery life of a flooded starting battery. Design features that contribute to the overall performance and durability of the TransPower ST1000 include an advanced paste formulation, heavy-duty plate design and rugged polypropylene case. The TransPower ST1000 is durable enough to withstand the rigorous abuse recreation vehicle and marine applications can cause.



# Product Specification Guide

| BCI GROUP SIZE  | TYPE              | CAPACITY <sup>A</sup> Minutes |          | CRANKING Performance     |                         | CAPACITY <sup>B</sup> Amp-Hours (AH) |            |            |             | ENERGY (kWh) | TERMINAL Type | DIMENSIONS <sup>C</sup> Inches (mm) |             |                     | WEIGHT lbs. (kg) |
|---|-------------------|-------------------------------|----------|--------------------------|-------------------------|--------------------------------------|------------|------------|-------------|--------------|---------------|-------------------------------------|-------------|---------------------|------------------|
|   |                   | @25 Amps                      | @75 Amps | C.C.A. <sup>D</sup> @0°F | C.A. <sup>E</sup> @32°F | 5-Hr Rate                            | 10-Hr Rate | 20-Hr Rate | 100-Hr Rate | 100-Hr Rate  |               | Length                              | Width       | Height <sup>F</sup> |                  |
| <b>6 VOLT DEEP-CYCLE FLOODED BATTERIES - with T2 TECHNOLOGY™</b>  |                   |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |             |                     |                  |
| GC2   | <b>T-105</b>      | 447                           | 115      | -                        | -                       | 175                                  | 193        | 210        | 232         | 1.39         | 1, 2, 3, 4, 5 | 10-1/4 (260)                        | 7-1/8 (181) | 11-1/16 (281)       | 62 (28)          |
| GC2   | <b>T-105 Plus</b> | 447                           | 115      | -                        | -                       | 185                                  | 207        | 225        | 250         | 1.50         | 1, 2, 3, 4    | 10-1/4 (260)                        | 7-1/8 (181) | 11-1/16 (281)       | 62 (28)          |
| GC2   | <b>T-125</b>      | 488                           | 132      | -                        | -                       | 185                                  | 207        | 225        | 250         | 1.50         | 1, 2, 3, 4    | 10-1/4 (260)                        | 7-1/8 (181) | 11-1/16 (281)       | 66 (30)          |
| GC2   | <b>T-125 Plus</b> | 488                           | 132      | -                        | -                       | 195                                  | 221        | 240        | 266         | 1.60         | 1, 2, 3, 4    | 10-1/4 (260)                        | 7-1/8 (181) | 11-1/16 (281)       | 66 (30)          |
| GC2H  | <b>T-145</b>      | 530                           | 145      | -                        | -                       | 195                                  | 221        | 240        | 266         | 1.60         | 1, 2, 3, 4    | 10-1/4 (260)                        | 7-1/8 (181) | 11-7/8 (302)        | 72 (33)          |
| GC2H  | <b>T-145 Plus</b> | 530                           | 145      | -                        | -                       | 215                                  | 239        | 260        | 287         | 1.72         | 1, 2, 3, 4    | 10-1/4 (260)                        | 7-1/8 (181) | 11-7/8 (302)        | 72 (33)          |
| 902   | <b>J305H-AC*</b>  | 781                           | 215      | -                        | -                       | 215                                  | 239        | 260        | 287         | 1.72         | 6             | 11-5/8 (295)                        | 7 (178)     | 14-3/8 (365)        | 98 (45)          |
| 903   | <b>L16H-AC*</b>   | 935                           | 245      | -                        | -                       | 357                                  | 400        | 435        | 483         | 2.89         | 6             | 11-5/8 (295)                        | 7 (178)     | 16-3/4 (425)        | 125 (57)         |
| <b>12 VOLT DEEP-CYCLE FLOODED BATTERIES - with T2 TECHNOLOGY™</b> |                   |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |             |                     |                  |
| 24  | <b>24TMX</b>      | 140                           | 36       | -                        | -                       | 70                                   | 78         | 85         | 94          | 1.13         | 5, 7, 8, 9    | 11-1/4 (286)                        | 6-3/4 (171) | 9-3/4 (248)         | 47 (21)          |
| 27  | <b>27TMX</b>      | 175                           | 45       | -                        | -                       | 85                                   | 97         | 105        | 117         | 1.40         | 5, 9          | 12-3/4 (324)                        | 6-3/4 (171) | 9-3/4 (248)         | 55 (25)          |
| 921   | <b>J185H-AC*</b>  | 440                           | 121      | -                        | -                       | 185                                  | 207        | 225        | 249         | 2.99         | 6             | 15 (381)                            | 7 (178)     | 14-5/8 (371)        | 128 (58)         |
| 24  | <b>SCS150</b>     | 150                           | 36       | 530                      | 650                     | 80                                   | 92         | 100        | 111         | 1.33         | 10            | 11-1/4 (286)                        | 6-3/4 (171) | 9-3/4 (248)         | 50 (23)          |
| 27  | <b>SCS200</b>     | 200                           | 52       | 620                      | 760                     | 95                                   | 105        | 115        | 128         | 1.54         | 10            | 12-3/4 (324)                        | 6-3/4 (171) | 9-3/4 (248)         | 60 (27)          |
| 30H   | <b>SCS225</b>     | 225                           | 57       | 665                      | 820                     | 105                                  | 118        | 130        | 144         | 1.73         | 10            | 13-15/16 (355)                      | 6-3/4 (171) | 9-7/8 (251)         | 66 (30)          |

## HydroLink™ Battery Watering Made Easy

Proper maintenance and periodic watering are important factors in maximizing the performance and life of Trojan deep-cycle flooded batteries. Battery maintenance can be a costly, time-consuming and messy job. With Trojan's HydroLink™ advanced, single-point watering system, precise battery watering is made easy saving valuable time and money.

Trojan's HydroLink watering system is specifically designed to work with Trojan 6-volt and 12-volt flooded batteries\*\* and takes the guess work out of properly watering flooded batteries. The unique HydroLink™ vent assembly features an independent water level indicator, valve shut off and dual flame arrestors. With a simple installation of the HydroLink manifolds and tubing, the system is ready for use. Once installed, a complete set of batteries can be filled in less than 30 seconds. The HydroLink™ watering system comes with a four-year, limited warranty.





# Product Specification Guide

| BCI GROUP SIZE                          | TYPE                      | CAPACITY <sup>A</sup> Minutes |          | CRANKING Performance     |                         | CAPACITY <sup>B</sup> Amp-Hours (AH) |            |            |             | ENERGY (kWh) | TERMINAL Type | DIMENSIONS <sup>C</sup> Inches (mm) |               |                     | WEIGHT lbs. (kg) |
|---|---------------------------|-------------------------------|----------|--------------------------|-------------------------|--------------------------------------|------------|------------|-------------|--------------|---------------|-------------------------------------|---------------|---------------------|------------------|
|   |                           | @25 Amps                      | @75 Amps | C.C.A. <sup>D</sup> @0°F | C.A. <sup>E</sup> @32°F | 5-Hr Rate                            | 10-Hr Rate | 20-Hr Rate | 100-Hr Rate | 100-Hr Rate  |               | Length                              | Width         | Height <sup>F</sup> |                  |
| <b>12 VOLT DEEP-CYCLE AGM BATTERIES</b> |                           |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |               |                     |                  |
| 24                                      | 24-AGM                    | 137                           | -        | 500                      | 600                     | 67                                   | 70         | 76         | 84          | 1.01         | 6             | 10-1/4 (260)                        | 6-5/8 (168)   | 9-1/2 (241)         | 54 (24)          |
| 27                                      | 27-AGM                    | 158                           | -        | 550                      | 660                     | 77                                   | 82         | 89         | 99          | 1.19         | 6             | 12-1/16 (306)                       | 6-13/16 (174) | 8-3/4 (221)         | 64 (29)          |
| 31                                      | 31-AGM                    | 177                           | -        | 600                      | 720                     | 82                                   | 92         | 100        | 111         | 1.33         | 6             | 12-15/16 (329)                      | 6-13/16 (174) | 9-5/16 (237)        | 69 (31)          |
| 31                                      | OverDrive AGM 31™         | 180                           | -        | 730                      | 875                     | 84                                   | 93         | 102        | 112         | 1.34         | 11            | 13 (329)                            | 6-13/16 (174) | 9-15/16 (237)       | 69 (31)          |
| <b>STARTING AGM BATTERY</b>             |                           |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |               |                     |                  |
| 31                                      | TransPower™ ST1000 AGM 31 | 200                           | -        | 1000                     | 1200                    | 88                                   | 93         | 102        | 105         | 1.26         | 11            | 13 (329)                            | 6-13/16 (174) | 9-15/16 (237)       | 75 (34)          |
| <b>DUAL PURPOSE AGM BATTERIES</b>       |                           |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |               |                     |                  |
| GC2                                     | 6V-AGM                    | 385                           | -        | 1100                     | 1400                    | 154                                  | 184        | 200        | 221         | 1.33         | 6             | 10-1/4 (260)                        | 7-1/8 (181)   | 10-3/4 (274)        | 65 (29)          |
| 8D                                      | 8D-AGM                    | 460                           | -        | 1450                     | 1850                    | 179                                  | 210        | 230        | 254         | 3.05         | 6             | 20-1/2 (521)                        | 10-9/16 (269) | 9-3/16 (233)        | 167 (76)         |

| BCI GROUP SIZE                  | TYPE   | CAPACITY <sup>A</sup> Minutes |          | CRANKING Performance     |                         | CAPACITY <sup>B</sup> Amp-Hours (AH) |            |            |             | ENERGY (kWh) | TERMINAL Type | DIMENSIONS <sup>C</sup> Inches (mm) |              |                     | WEIGHT lbs. (kg) |
|---------------------------------|--------|-------------------------------|----------|--------------------------|-------------------------|--------------------------------------|------------|------------|-------------|--------------|---------------|-------------------------------------|--------------|---------------------|------------------|
|                                 |        | @25 Amps                      | @75 Amps | C.C.A. <sup>D</sup> @0°F | C.A. <sup>E</sup> @32°F | 5-Hr Rate                            | 10-Hr Rate | 20-Hr Rate | 100-Hr Rate | 100-Hr Rate  |               | Length                              | Width        | Height <sup>F</sup> |                  |
| <b>DEEP-CYCLE GEL BATTERIES</b> |        |                               |          |                          |                         |                                      |            |            |             |              |               |                                     |              |                     |                  |
| GC2                             | 6V-GEL | 394                           | -        | 575                      | 825                     | 154                                  | 167        | 189        | 198         | 1.19         | 6             | 10-1/4 (260)                        | 7-1/8 (181)  | 10-7/8 (276)        | 68 (31)          |
| 24                              | 24-GEL | 147                           | -        | 330                      | 460                     | 66                                   | 72         | 77         | 85          | 1.02         | 6             | 10-7/8 (276)                        | 6-9/16 (167) | 9-5/16 (236)        | 52 (24)          |
| 27                              | 27-GEL | 179                           | -        | 395                      | 545                     | 76                                   | 84         | 91         | 100         | 1.20         | 7             | 12-13/16 (326)                      | 6-3/4 (171)  | 9-1/4 (234)         | 63 (29)          |
| 31                              | 31-GEL | 200                           | -        | 445                      | 620                     | 85                                   | 94         | 102        | 108         | 1.30         | 7             | 12-15/16 (329)                      | 6-3/4 (171)  | 9-5/8 (245)         | 70 (32)          |



\* Polyon™ Case

- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20-Hour and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions are based on nominal size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7mm) spacing minimum.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

## Terminal Configurations





## Experience The Trojan Difference – Reputation Built on Quality, Leadership and Innovation

### Leadership

Founded in 1925 by co-founders George Godber and Carl Speer, Trojan Battery Company is the world's leading manufacturer of deep-cycle batteries. From deep-cycle flooded batteries to deep-cycle AGM and gel batteries, Trojan has shaped the world of deep-cycle battery technology with over 85 years of battery manufacturing experience. With the invention of the golf car battery for the Autoette vehicle in 1952, Trojan pioneered the development of deep-cycle battery technology for the golf industry; successfully introducing mobilization to the game of golf. For Trojan, this began a legacy of leadership and innovation that prevails today in the global, deep-cycle markets spanning applications for marine and recreational vehicles, aerial work platforms, transportation, renewable energy, golf, and floor machines. Today, Trojan batteries are available worldwide through our global network of master distributors.

Headquartered in Santa Fe Springs, CA, Trojan's operations include ISO 9001:2008 certified manufacturing plants in California and Georgia, two advanced research and development centers dedicated exclusively to deep-cycle battery technologies and international offices located in Europe, UAE and Asia. Trojan is a proud member of the Battery Council International (BCI) and a technical research partner with the Bulgarian Academy of Sciences.

### Research and Development

Quality and innovation are the cornerstones of our product development. Engineering teams, backed by over 200 years of deep-cycle development expertise, work together to innovate and bring to market advanced battery technologies that exceed our customers' expectations for outstanding battery performance.

To ensure the quality and superior performance of our batteries, Trojan applies the most rigorous testing procedures in the industry to test for cycle life, capacity, charger algorithms and both physical and mechanical integrity. Trojan's battery testing procedures adhere to both BCI and IEC test standards. Trojan's state-of-the-art R&D facilities include charger characterization and analytical labs, battery prototype and evaluation labs and battery autopsy centers all dedicated to providing you with a superior battery that you can rely on.



Prototype development and evaluation

### Environmental Stewardship

At Trojan Battery, when we say, "Clean energy for life™," we mean every word. As proactive supporters of environmental sustainability, our environmental stewardship focuses on clean energy initiatives and recycling programs.

- Trojan batteries are 97% recyclable. The container plastic, battery lead and electrolyte from old deep cycle batteries can be recycled to produce new Deep-Cycle batteries.
- Through its partnership with Southern California Edison (SCE) Trojan saves over 8 million kilowatt hours and cuts CO2 emissions by over 12 million pounds significantly reducing our annual energy consumption and carbon foot print.



Your Local Trojan Battery Representative:

**For more information,  
call 800.423.6569  
or + 1.562.236.3000  
or visit [www.trojanbattery.com](http://www.trojanbattery.com)**